



Fission chamber for out-of-core use

Application

- Detection of thermal neutrons in a flux range of 1 to 10^{10} n.cm⁻².s⁻¹

Features


- High sensitivity
- Very high safety of use

Nuclear characteristic			
Sensitivity to thermal neutrons ¹	Pulse mode	1	c.s ⁻¹ /n.cm ⁻² .s ⁻¹
	Fluctuation mode	4x10 ⁻²⁶	A ² .Hz ² /n.cm ⁻² .s ⁻¹
	Current mode	2x10 ⁻¹³	A/n.cm ⁻² .s ⁻¹
Neutron flux ranges	Pulse mode ²	1 - 10 ⁶	n.cm ⁻² .s ⁻¹
	Fluctuation mode ³	8x10 ⁴ - 2x10 ⁹	n.cm ⁻² .s ⁻¹
	Current mode ⁴	10 ⁴ - 10 ¹⁰	n.cm ⁻² .s ⁻¹
Gamma sensitivity		7x10 ⁻⁹	A/Gy.h ⁻¹
Exposure limits	Thermal neutrons ⁵	max 2x10 ¹⁹	n.cm ⁻²
	Gamma exposure	max 10 ⁹	Gy
	Gamma dose rate	max 10 ⁴	Gy.h ⁻¹

Electrical characteristics			
Insulating resistance at 600 VDC ⁶	at 20°C	min 10 ¹²	Ohm
	at 250°C	min 5x10 ⁸	Ohm
Operating voltage	Nominal up to 250°C	600	VDC
	Maximum at 20°C	800	VDC
	Limit with no radiation	1300	VDC
Charge collection time ⁷		80	ns
Detector capacitance		240	pF

Mechanical and physical characteristics		
Detector	Case, electrodes	Aluminum
	Insulators	Al ₂ O ₃
	Sensitive layer	U > 90% enriched in ²³⁵ U
	Filling gas ⁸	Ar + 4% N ₂ at 250 kPa
Connector	Type ⁹	Watertight HN
	Insulator	Al ₂ O ₃

Outline

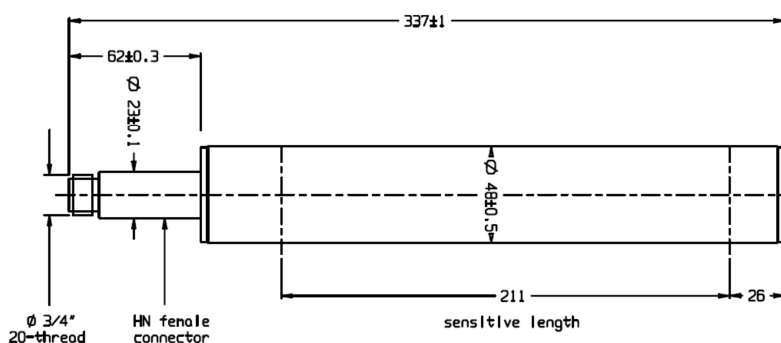

Notes.

¹ Values depending on the characteristics and the calibration of the measurement equipment. The pulse sensitivity is calculated from the (alpha, neutron) discrimination curve for a discriminating threshold corresponding to a counting rate of 1 c.s⁻¹.

² Pulse mode operating range for a measurement equipment with a resolution shorter than the collection time of the detector.

³ Fluctuation operating range measured on equipment with a 1 to 30 kHz band pass.

⁴ Current mode operating range: The lower limit of the current mode operating range depends on the electronics (especially on the input amplifier) and on the signal / parasitic current ratio (parasitic current = leakage current + gamma current + α -current). The upper limit is depending both on the detector and electronics (loss of linearity).

⁵ Flux corresponding to a 1 % sensitivity loss of the detector.

⁶ For sensible fission chambers ($s > 0.1$ c.s⁻¹/n.cm⁻².s⁻¹), the α -current is predominant in relation to the leakage current from the insulators. The insulating resistance is then measured by the ratio $\Delta U/\Delta I$ of the I=f(U) curve determined without any ionizing radiation.

⁷ Charge collection time: the measured value depends on the electronics and on the cable capacitance.

⁸ The use of a gas mixture (Ar + N₂) increases the electron velocity and therefore favours a short collection time.

⁹ In order to avoid humidity penetration during storage, the connector is closed with a cap to be removed just before use. As a general rule, prevent any humidity penetration at the connection level (refer to "Instructions for use and handling" in the package). Other connector types are possible on special request.

Max operating temperature of detector and cable: 250 °C

Unless otherwise stated, all characteristics are given at 20°C and dimensions in mm.

2017-04-24